




**Model Number & Name**  
9039W/FH/5235-05/8669F

**Induction Cooking Station With Two Induction Cookers, NSF4, 50", 208V-240V, Dove White, Flat Ends, Closed Front Food Protector, Breath Shield, Lighted, (1) 8" Plate Rest**

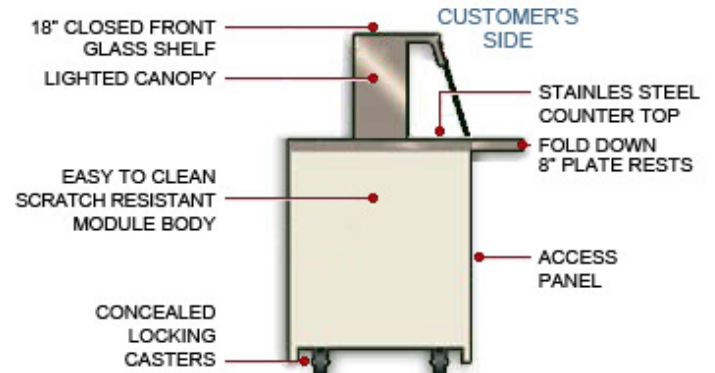


## Technical Information

### Components

9330W/FH/5235-05/8669/8508B/P50/8968/8968/C

### Model Features

- Counter Tops Are Heavy Duty 14 Gauge 304 Stainless Steel With A #4 Polished Shine, Sanitary Finish (No Pits)
- The Top Is Turned Down On All Sides And All Corners Are Fully Welded, Ground And Polished Smoothly
- Fire Retardant ABS Thermoplastic Body Is Mounted To A Heavy Gauge Steel Frame
- ABS Is UL Certified To Limit Surface Flammability, Smoke Generation, Toxic Gas Generation, And Low Flammability
- Facade Has Attractive Recessed Panels For The Addition Of Optional Laminate Panels
- Optional Decorator Laminate Panels Are Available In Many Colors And Wood Grains To Enhance Your Location
- Extremely Dent And Scratch Resistant Body With Color All The Way Through
- Scratches Will Be Difficult To See Because The Color Is Through And Through - [View All Color Options](#)
- All Materials Have NSF Approval For Cleanliness Making Them Easy To Clean - No Hidden Nooks Or Crannies - Retards Mold And Bugs
- No Sharp Edges Or Exposed And Unsightly Latches To Snag Clothing
- Under Shelves Are Heavy 16 Gauge Stainless Steel With A Bright #4 Finish And Are Easily Adjustable Up And Down - [Under Shelves Optional](#) Unless Otherwise Noted
- Delivered Fully Assembled With All Accessories Mounted And Wired To A Single Cord And Plug
- Modules Bear The Underwriter's Laboratories UL Label For Electrical And Fire Safety
- Modules Bear The National Sanitation Foundation Label For Health And Temperature Performance
- Compliance With Sanitation Standards Is Confirmed By A Listing On The [NSF Web Site](#)
- Pans Are Optional
- Proudly Manufactured In The USA 
- 4" Dia. Concealed Lock-In-Place, Plate Mounted, Non-Skid Casters Provide For Easy Mobility



# of Hot Wells (Steam Wells)

2 Induction Cooktops

**Hot Well Features**

- Self-Contained Mobile Induction & Demonstration Cooking Station
- Two Induction Cookers Allow Two Separate Recipes To Be Cooked Simultaneously
- Thermostat Adjusts Temperature Per [NSF 4 Standards](#)
- Tamper-Resistant Controls Are On Rear Of Buffets Hidden From Customer View & Won't Snag Clothes
- **Buffets Installed Against A Wall Should [Move Controls To The Front](#) (Add SKU 8510A To Cart)**

**Counter Top Height**

36" Standard Height

**Serving Counter Description**



Galley Model # 9039W - Induction Cooking Station With Two Induction Cookers, NSF4, 50", 208V-240V, Dove White, Flat Ends

**End Panel Description**




- [Standard Flat Ends - No Handles](#)

**Canopy Features**



- Fluorescent Light Fixture With Separate On/Off Switch Illuminates Food
- Single Deck Glass Shelf 17" High x 13" Deep - [View Profile Of Canopy Dimensions](#)
- Closed Front Food Protector Blocks Customers Access To Food | Server Required
- Breath Shields Are Installed On One Side - [Side Breath Shields Are Optional](#)
- "See-Thru" Breath Shields Have Swing And Lift Up Polished ¼" Thick Tempered Safety Glass With Radius Corners
- Server Reach-In Opening Is 17" | Front Food Protector Is Flush With Front Of Module
- Air Gaps Exist At The Front To Allow Air Circulation, Minimizing Condensation On The Glass
- Flat Tempered Safety Glass Shelf With Sloped Front Tempered Safety Glass Is Mounted On Stainless Steel Pylon
- Top Flat Glass Serving Shelf Remains Cool And Can Be Used As A Display Area For Snacks Or Literature
- Materials Meet [NSF 2 Standards](#) For Cleanability
- Canopy Is Manufactured To UL Electrical Standards
- It Is Wired Into Base Module's Electrical System To A Single Cord And Plug
- Canopy Is Factory Installed And Shipped Mounted On The Base Module
- All Edges Are Polished
- Galley Model #5235-05

**Plate Rest / Tray Slide Description**



- 8" Fold-Down Plate Rest - Mounted On Front Side (Galley Model #8669/8508B, QTY. 1)

**Overall Dimensions**

50" Wide x 52.5" High x 36" Depth (127 cm Wide x 133.4 cm High x 91.4 cm Depth)

**Closure Panel Location**

Closure Panel On Front, None On Rear

**Volts / Cycles / Phase**

208-240/50-60/1

**Amps**

30.8

**NEMA Plug Provided**

PLUG TYPE	SPECIFICATION	END VIEW	SIDE VIEW
6-20P	2 Pole 3 Wire Grounding 250 Volt 20 Amp		

- (2) 6-20P

<b>Power Cord and Plug Length</b>	9.5 ft
<b>Watts</b>	6000
<b>Electrical Control Location</b>	Server's Side (Rear of Module)
<b>Construction Materials</b>	Stainless Steel, ABS Composite, Tempered Safety Glass
<b>Warranty (See Full Policy in Resources)</b>	<a href="#">365 Days Parts &amp; Labor</a>
<b>Manufacturer</b>	GalleyLine <sup>®</sup> by Galley Inc.   info@GalleyLine.com   561-748-5200
<b>Weight (lbs.)</b>	613
<b>Model Number (SKU) - Original</b>	9039W/FH/5235-05/8669/8508B,9039W/FH/5235-05/8669/8508B/P50/C
<b>Freight Class</b>	100